


# SWIMMING POOL/HOT TUB SPECIFICATIONS

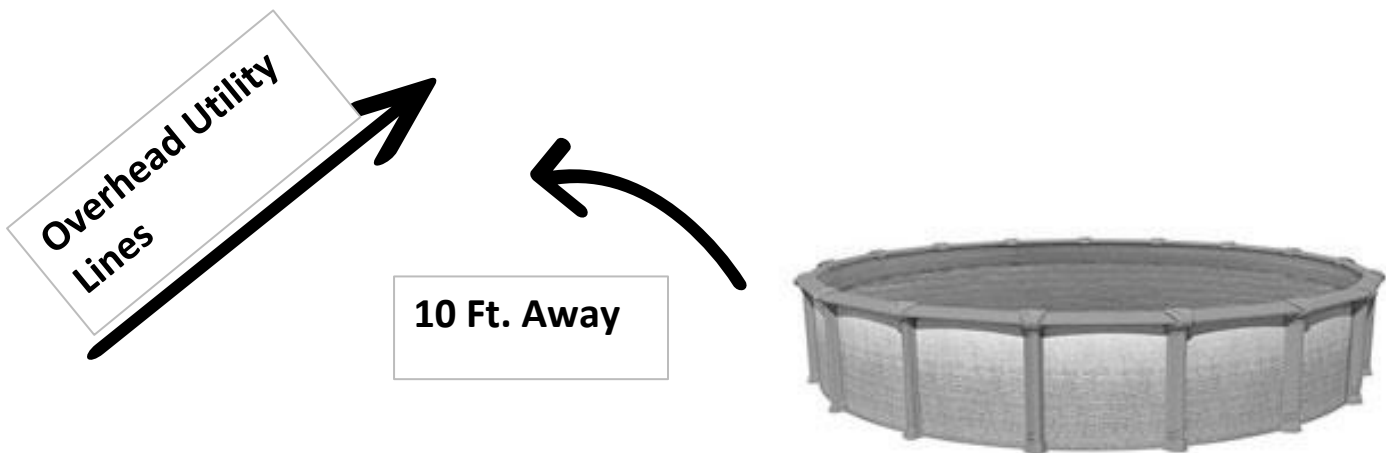

**\*\*\*A Plat of Survey is required when applying for a preliminary pool inspection\*\*\***

\* A Preliminary pool inspection is required before a pool is installed. This inspection is to make sure that the property meets all of the requirements to install a pool. **If the preliminary inspection is approved then a permit can be issued to install a pool.**

\* If a contractor is installing the pool, that contractor must be licensed and bonded with the Village of FOREST VIEW.

\* Pool must be at least 4ft off each lot line and at least 4ft away from any structure or building, with the exception of an attached permanent deck or patio.

\* The property is required to have a latched fence on all sides.

\* Above ground pools cannot exceed 6ft in height, including attached fences, railing, lattice, and/or structural and decorative additions.

\* In-ground pools will require additional fencing around the pool or deck area.

\* **Extension cords are not allowed to be run to the pool.**

\* All electrical supply requirements must be installed by a licensed electrical contractor. See page 2 for swimming pool and hot tub electrical tie-in requirements.

\* Before making purchase it is good practice to ensure it can meet all village requirements.

**Village of FOREST VIEW**

**Email: [jbrniak@forestview-il.org](mailto:jbrniak@forestview-il.org)**

**7000 46th St.**

**Ph: 708-788-3429**

## **Village of FOREST VIEW**

### **Swimming Pool Electrical Tie-In**

\* Electrical, no overhead utility electric wires or conductors shall cross any part of the pool area or be located within 10 feet of either side of the pool line measured horizontally.

\* Underground service cable shall not be permitted under the pool or within 5 feet of the inside wall of the pool. When space limitations prevent service cable from being routed 5 feet from the pool, such cables must be installed 24" deep in 4" conduit at customer's expense.

### **Requirements**

1. Size of underground conductor - 12GA minimum.
2. Ridgid conduit 1/2" minimum.
3. A dedicated GFCI protected circuit is required.
4. Outlet should be no closer than 6 feet from pool.
5. Proper bonding of pool and all pool equipment must be installed.

### **Hot Tub Electrical Tie-In**

\* Horizontal limit of aerial clearance will not measure less than 10 feet from the inside wall of the hot tub.

\* Underground service cable shall not be permitted under the hot tub or within 5 feet from the inside wall of the hot tub. When space limitations prevent service cable from being routed 5 feet from the pool, such cables must be installed 24" deep in 4" conduit at customer's expense.

**\*\*\* All Electrical work must be completed by a licensed electrical contractor in the Village of FOREST VIEW.\*\*\***

**Village of FOREST VIEW**  
**Email: [jbrniak@forestview-il.org](mailto:jbrniak@forestview-il.org)**

**7000 46th St.**  
**Ph: 708-788-3429**